

W701

7" Mobile Data Terminal with CSR A6

**Features**

- 7 inch touch screen, 1 power key
- WinCE6.0
- Supports analog video input 1*CVBS input, 2*RS232, 1*USB OTG, 3*DI/2*DO
- Supports WCDMA/GPRS, GPS
- 10V-32V / No battery

Specifications**Processor & Operating System**

CPU	ARM Cortex-A9 Core 800MHz, CSR A6
-----	-----------------------------------

Operating System	WinCE 6.0
------------------	-----------

Memory

DDR3	256MB, up to 512MB
------	--------------------

Nand Flash	128MB, up to 4GB
------------	------------------

Display

	7 inch WVGA 800*480
--	---------------------

	LED backlight, wide type
--	--------------------------

	350 nits
--	----------

Keypad & Buttons

	1 power button
--	----------------

	1 LED
--	-------

Interface ports

RS232 serial ports	2
CVBS Input	1
USB ports	1 x 2.0 USB OTG

Accessible Expansion Slots

Internal/External SD socket	1 x Micro SD and 1 x External SD, support up to 32G
Internal SIM card	GSM communication

I/O port

Digital input x 3 line

Digital output x 2 line

Audio

Speaker	2W 8ohm, Size:40mm
	EAR & MIC

GPS

GPS/BD Module ATGM332D

66 channels

Sensitivity -163 dBm

GSM/GPRS/WCDMA (3G)

GPRS module	SIM800 850 MHz/900 MHz/1800 MHz/1900 MHz
WCDMA module	MU709 900 MHz/1800 MHz/1900 MHz/2100MHz
	MU609 850 MHz/900 MHz/1800 MHz/1900 MHz
	Sensitivity -106 dBm

Antenna

GPS Antenna	External
GSM Antenna	External

Physical Characteristics

Size	190*118*25mm
Weight	1.5 kg

Environment

Main Power	9~36V
Battery	No battery
Operating Temperature	-20°C to +70°C
Humidity	5% - 90%


I/O Connector



Power Button



TF Card

USB

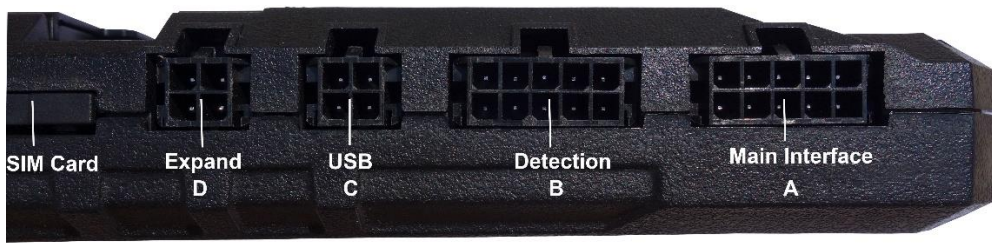

Pin Assignment

Please choose what interfaces you want, we will make new extension lines for you.

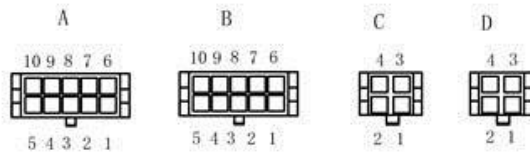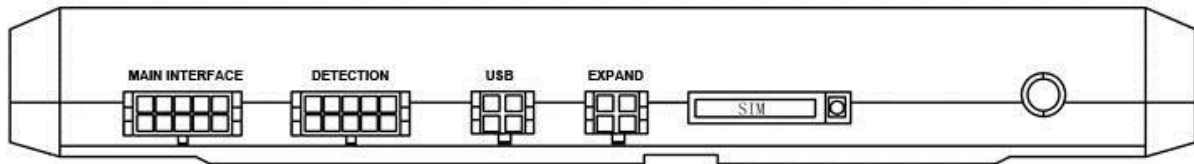

A		B		C		D			
1	B-	1	UTXD1	COM7	1	USB D+	1	USB D+/UTXD0 /LINEINL	COM5
2	B+	2	URXD1		2	USB D-		2	
3	ACC	3	INPUT0/KEY	GP101_14	3	USB 5V	3	USB 5V/MIC_P	
4	GND	4	INPUT1	GP101_10	4	GND	4	GND/MIC_N	
5	TXD1	COM2	5	INPUT2	GP101_22				
6	RXD1		6	OUTPUT0	GP101_7				
7	GND		7	OUTPUT1	GP101_23				
8	TXD2	COM4	8	GND					
9	RXD2		9	CVBS1					
10	INPUT3		GP102_14	10	CVBS2				

W7 interfaces